



## TECHNICAL DATA

### MASSES

Basic mass	74 kg
Operating mass	82 kg

### COMPACTION

Frequency	100 Hz
Amplitude	1,63
Amplitude (front/rear)	1.02 mm
Centrifugal force (front/rear)	12 kN

### TRACTION

Max. gradeability	30 %
Max. working speed	30 m/min

### ENGINE

Manufacturer/Model	Honda GX 120
Emissions according to	Stage V/CARB Phase III
Type	Air cooled gasoline
Number of cylinders	1
Fuel type	Gasoline
Fuel consumption /h, avg.	0.9 l
Fuel tank capacity	2 l
Power	2.6 kW at 3600 rpm
Water tank capacity	13.5 l

### DRIVE SYSTEM



Drive system	Mechanical
--------------	------------

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



## DIMENSIONS

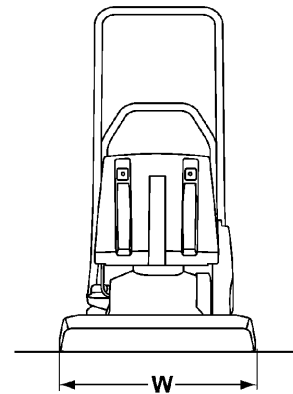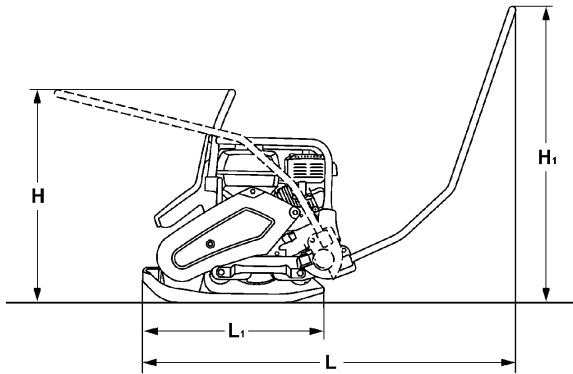

### DIMENSIONS

H. Height	658 mm
H1. Height	962 mm
H2. Height	700 mm
L. Length	1084 mm
L1. Length	545 mm
W. Basic plate width	500 mm

### STANDARD EQUIPMENT

- Foldable steering handle with vibration isolation
- Highly wear resistant base plate
- Water sprinkler system
- Automatic shutdown at low oil level
- All around protection for V-belt
- Protection frame for powerpack
- Recoil starter
- Carrying handles
- One point lift

### OPTIONAL EQUIPMENT

- Comfort handle
- Comfort handle, center mount
- Puncture proof transport wheels (+4kg)
- Service Kit

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.