



## TECHNICAL DATA

### MASSES

Basic mass	82 kg
Operating mass	83 kg

### COMPACTION

Frequency	90 Hz
Amplitude	1,63
Water tank volume	7 l
Amplitude (front/rear)	0.89 mm
Centrifugal force (front/rear)	10 kN

### TRACTION

Max. gradeability	30 %
Max. working speed	25 m/min

### ENGINE

Manufacturer/Model	Honda GX 120
Emissions according to	Stage V /CARB Phase III
Type	Air cooled gasoline
Number of cylinders	1
Fuel consumption /h, avg.	0.9 l
Fuel tank capacity	2 l
Power	2.6 kW @ 3600 rpm

### DRIVE SYSTEM



Drive system	Mechanical
--------------	------------

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



## DIMENSIONS

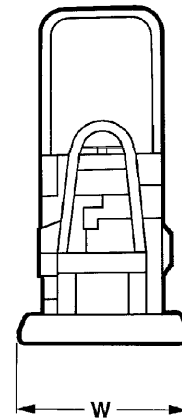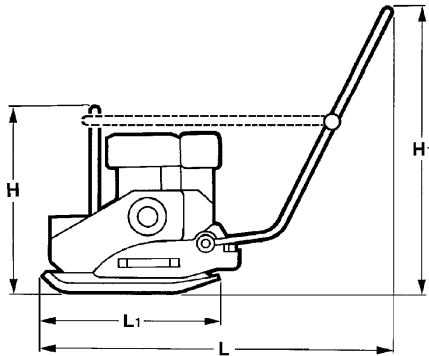

### DIMENSIONS

H. Height	535 mm
H1. Height	915 mm
L. Length	1115 mm
L1. Length	558 mm
W. Basic plate width	360 mm

### STANDARD EQUIPMENT

- Foldable steering handle with vibration isolation
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- All around protection for V-belt
- Protection frame for powerpack
- Recoil starter
- Carrying handles
- One point lift

### OPTIONAL EQUIPMENT

- Water sprinkler system 7,0l (+10kg)
- Comfort handle
- Puncture proof transport wheels (+4kg)
- Block paving mat
- Service Kit

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.