



## TECHNICAL DATA

### MASSES

|                |       |
|----------------|-------|
| Basic mass     | 90 kg |
| Operating mass | 91 kg |

### COMPACTION

|                                |         |
|--------------------------------|---------|
| Frequency                      | 90 Hz   |
| Amplitude                      | 1,63    |
| Water tank volume              | 7.0 l   |
| Amplitude (front/rear)         | 1.24 mm |
| Centrifugal force (front/rear) | 18 kN   |

### TRACTION

|                    |          |
|--------------------|----------|
| Max. gradeability  | 30 %     |
| Max. working speed | 25 m/min |

### ENGINE

|                           |                         |
|---------------------------|-------------------------|
| Manufacturer/Model        | Honda GX 160            |
| Emissions according to    | Stage V /CARB Phase III |
| Type                      | Air cooled gasoline     |
| Number of cylinders       | 1                       |
| Fuel consumption /h, avg. | 1.1 l                   |
| Fuel tank capacity        | 3.1 l                   |
| Power                     | 3.6 kW at 3600 rpm      |

### DRIVE SYSTEM



|              |            |
|--------------|------------|
| Drive system | Mechanical |
|--------------|------------|

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



## DIMENSIONS

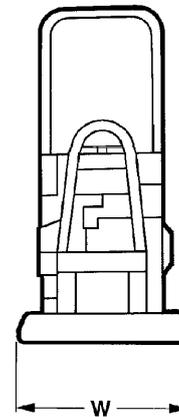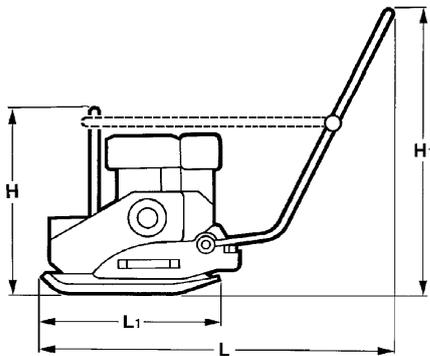

### DIMENSIONS

|                      |         |
|----------------------|---------|
| H. Height            | 535 mm  |
| H1. Height           | 915 mm  |
| L. Length            | 1115 mm |
| L1. Length           | 558 mm  |
| W. Basic plate width | 450 mm  |

### STANDARD EQUIPMENT

- Foldable steering handle with vibration isolation
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- All around protection for V-belt
- Protection frame for powerpack
- Recoil starter
- Carrying handles
- One point lift

### OPTIONAL EQUIPMENT

- Water sprinkler system 7,0l (+10kg)
- Comfort handle
- Puncture proof transport wheels (+4kg)
- Block paving mat
- Service Kit

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.